




# Type 2 Cylindrical HEPA Filter Inserts

1700 m<sup>3</sup>/hr and 3400 m<sup>3</sup>/hr

**High Temperature**

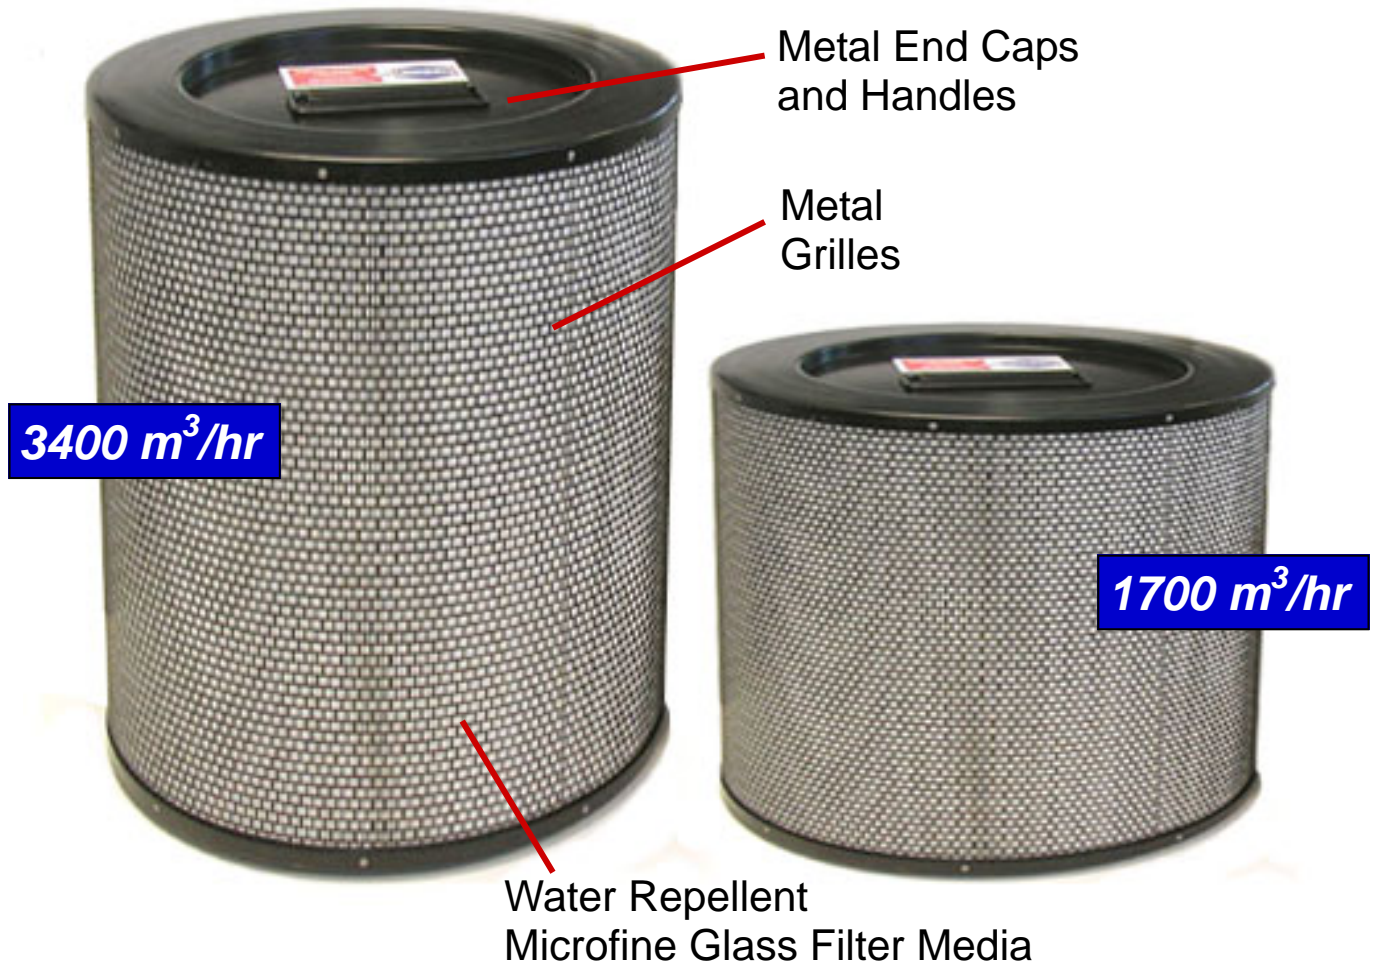

Specification:	BEG/SPEC/ENG/PSPEC/26	
Type:	High Temperature, Non-Combustable	
Dimensions:	335h x 518 dia (1700 m <sup>3</sup> /hr)	624h x 518 dia (3400 m <sup>3</sup> /hr)
Flow:	1700 m <sup>3</sup> /hr & 3400 m <sup>3</sup> /hr	
Efficiency:	Better than 99.99% to BS3928	
Pressure Drop:	Not greater than 250 Pa (1700 m <sup>3</sup> /hr)	350 Pa (3400 m <sup>3</sup> /hr)

**EMCEL Filters Limited**, Blatchford Road, Horsham, West Sussex RH13 5RA  
Tel: 01403 253215 Fax: 01403 217011 Email: brichardson@emcelfilters.co.uk

[www.emcelfilters.co.uk](http://www.emcelfilters.co.uk)